









# FA 40 500 10, FA 40 500 15, FA 40 500 20

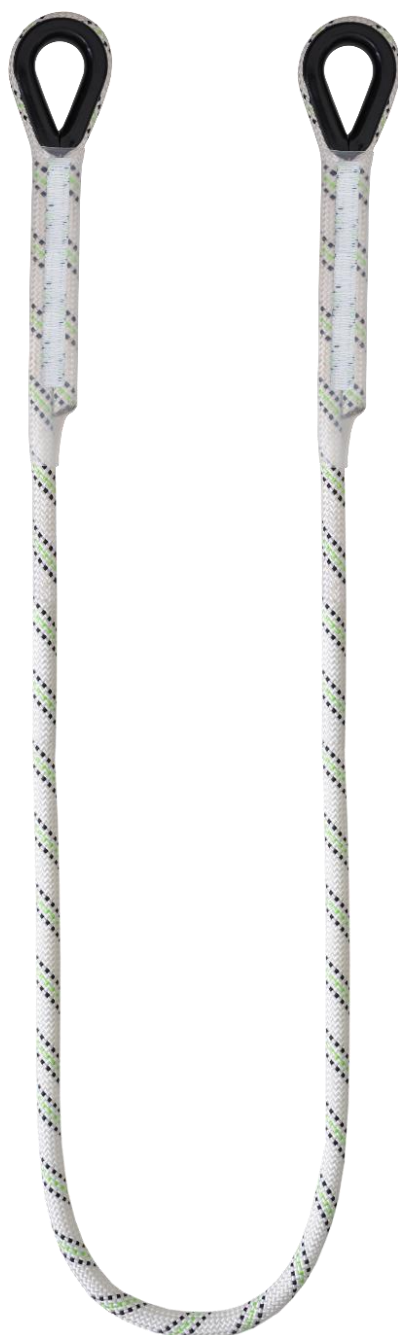

REF.	FA 40 500 XX
CE	EN 354:2010
LG.	1.0 m   1.5 m   1.8 m
MAT.	 PA 11 mm
	---
R (kN)	22 kN
	0.17 KG   0.20 KG   0.22 KG

MAT.		R (kN)
Matière	Matière connecteurs	Résistance (en kN)
Material	Material of connectors	Resistance (kN)
Material	Material de los conectores	Resistencia (en kN)
Materia	Materie connettori	Resistenza (in kN)
Material	Material der Verbinder	Belastbarkeit (in kN)

<b>HS CODE</b>
56090000
<b>CARTON SIZE / PCS.</b>
60 X 40 X 24 cm / 50
<b>AET (UE) N°2777/10360-02/E05-01</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
<b>AET (UKCA) N°AB0321/16027-01/E01-01</b>
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>MODULE D 11 IN14/14003</b>
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom